


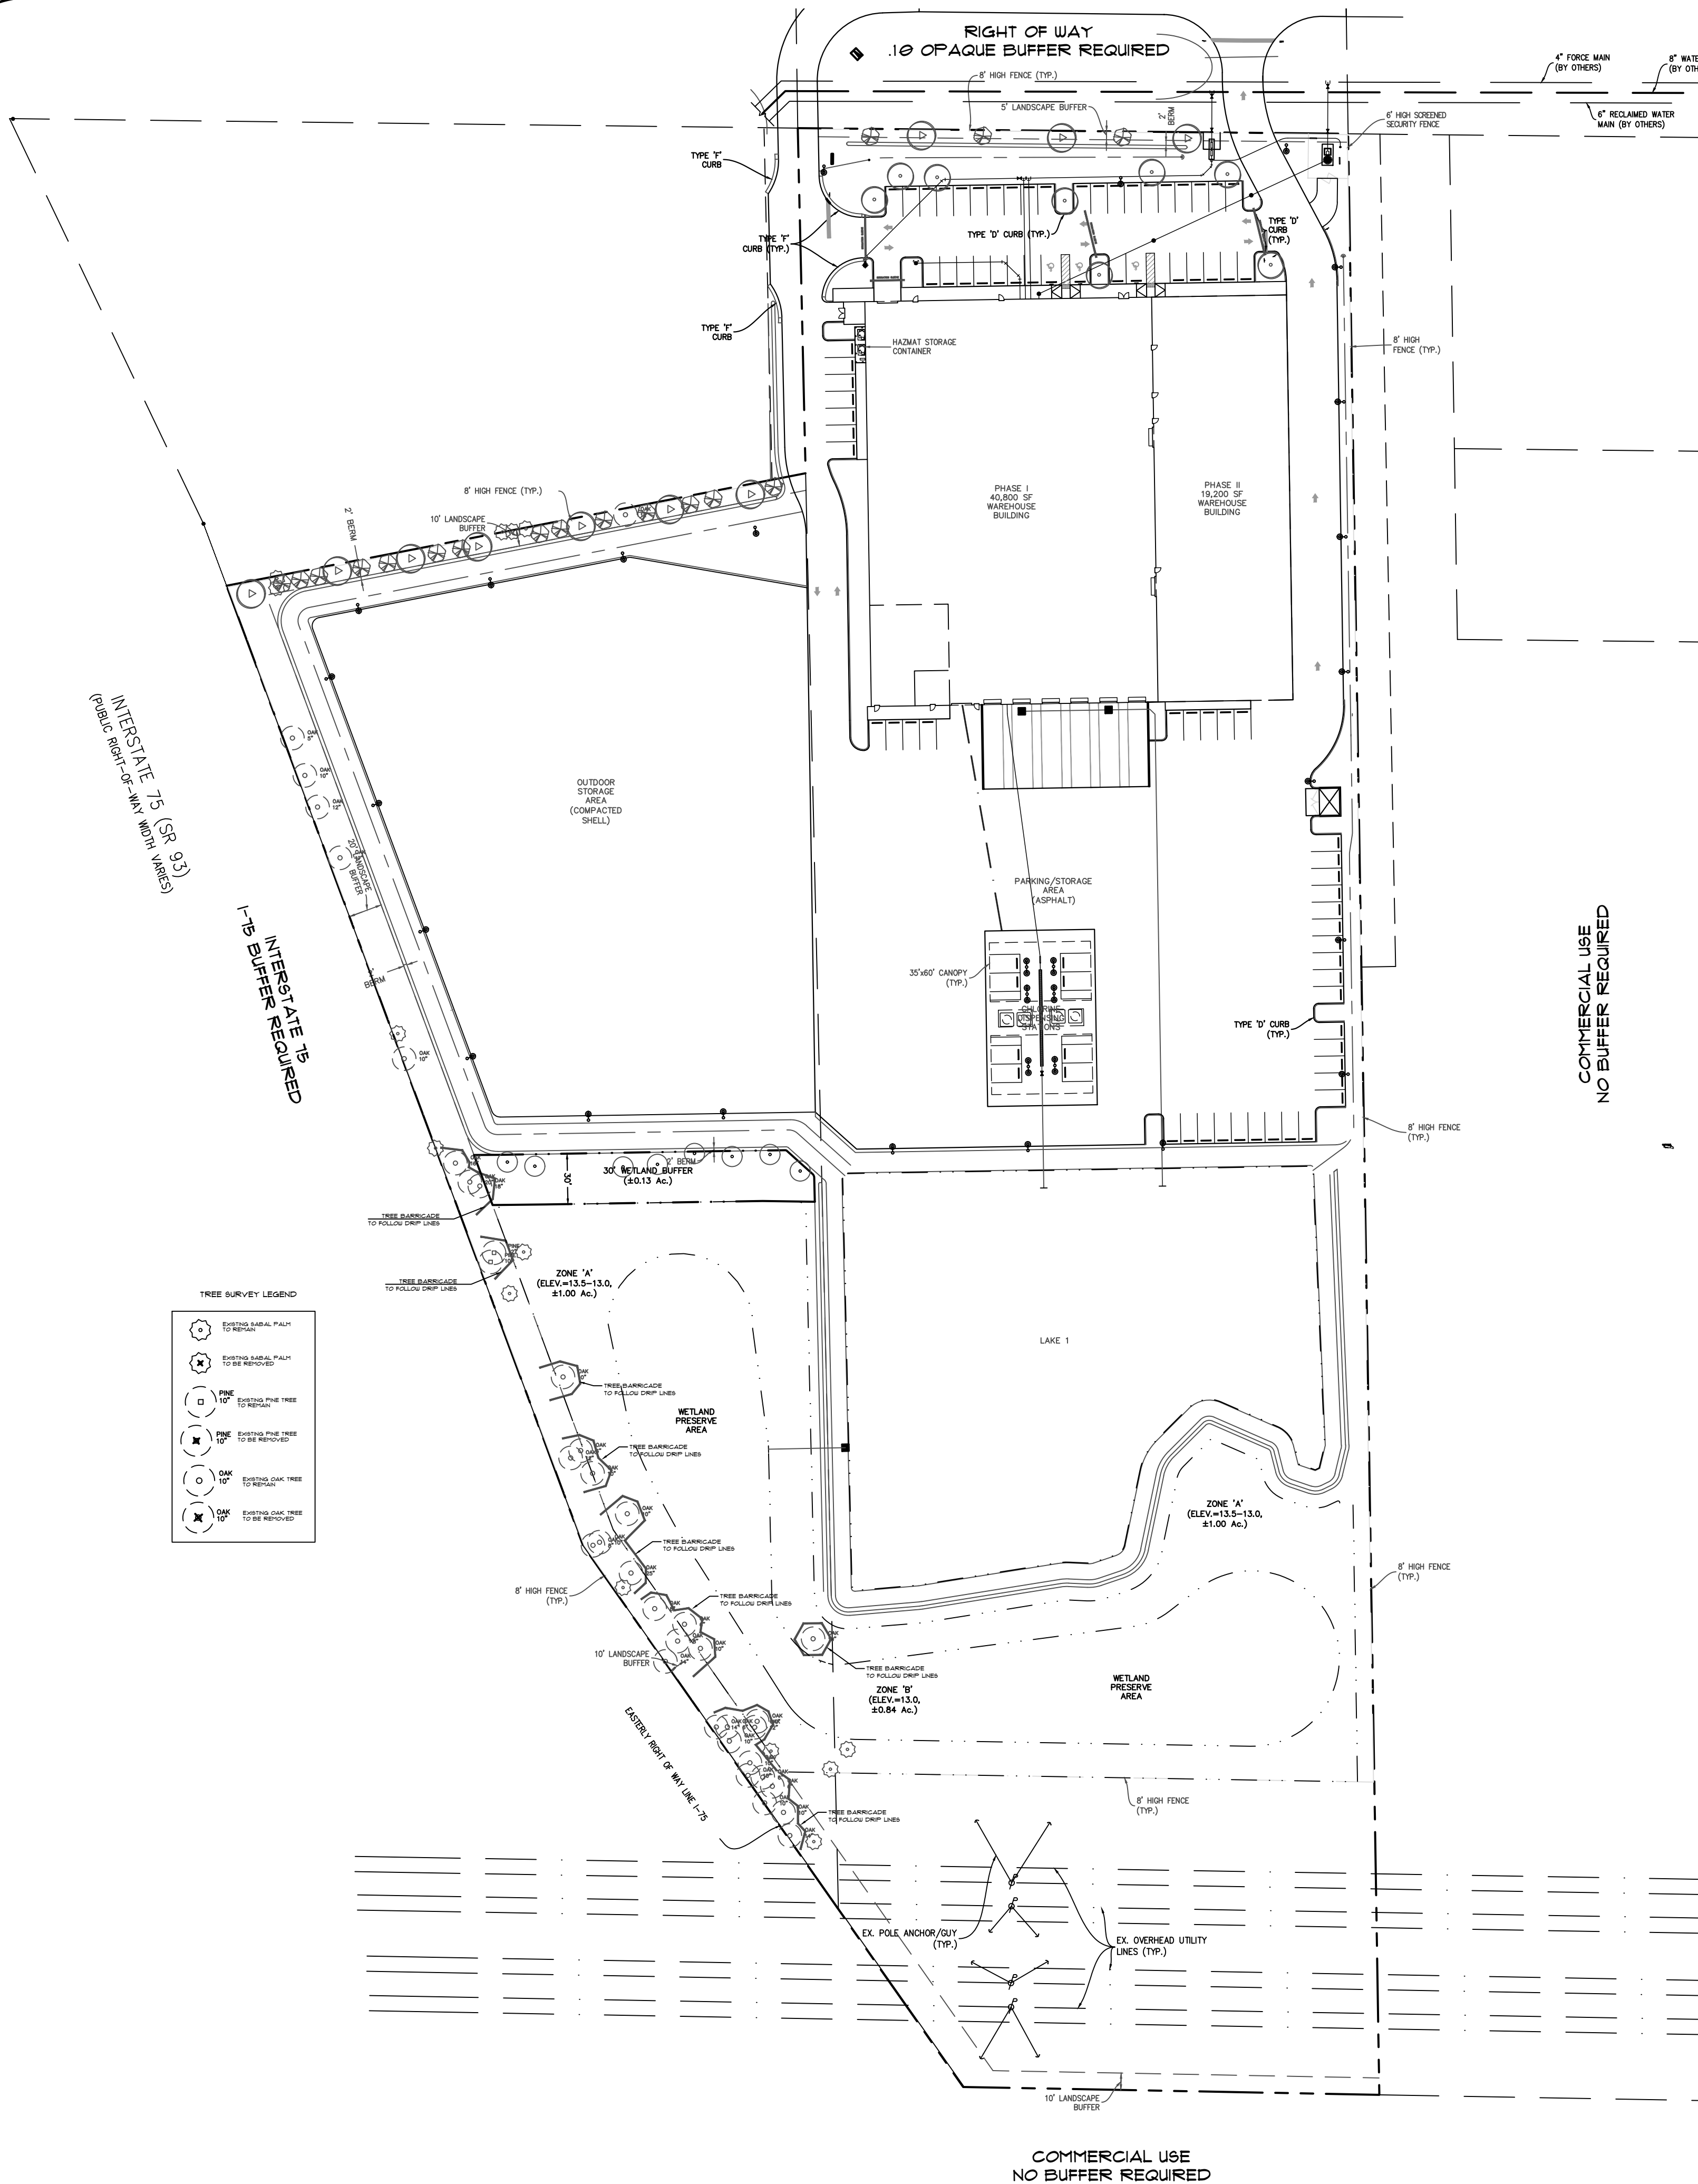

CITY OF VENICE LANDSCAPE AND BUFFERING REQUIREMENTS	
PROJECT INFORMATION	
PROJECT NAME	POOL CORP
PROJECT ADDRESS	LAUREL ROAD
PROJECT ZONING CLASSIFICATION	INDUSTRIAL
FARCEL ID#	381010002 381010003
ARTICLE XVII. SEC. 54-505 TREE PLANTING, RELOCATION OR REPLACEMENT	
TOTAL PROJECT AREA	11.81 ACRES
30 INCHES OF CALIPER PER ACRE	238 CAL/INCHES
PLUS HERITAGE TREES TO BE REMOVED	176 CAL/INCHES
REPLACEMENT TREE REQUIREMENTS TOTAL	426 CAL/INCHES
TREE CALIPER INCHES PROVIDED	
EXISTING TREES TO REMAIN	491 CAL/INCHES
REPLACEMENT OAKS	20 CAL/INCHES
TOTAL PROPOSED TREE REPLACEMENT CALIPER INCHES	421 CAL/INCHES
ARTICLE 8 SEC. 124-122 (2) VEHICULAR PARKING	
UNCOVERED SURFACE PARKING AND VEHICLE USE AREA	13,974 SQFT
10% OF AREA REQUIRED AS LANDSCAPE	1,397 SQFT
1 TREE PER PARKING ISLAND	
PARKING TREES REQUIRED	8 TREES
PARKING TREES PROVIDED	8 TREES
TOTAL TREE CREDITS	

LDR SEC 124-122 - BUFFER YARDS			
NORTH PROPERTY LINE			
ABUTTING USE	ROW	PUBLIC RIGHT-OF-WAY	
	BUFFER TYPE	BUFFER WIDTH	BUFFER WALL REQUIRED
	Ø1	6'	NONE
BUFFER YARD LENGTH		326 LNFT	
REDUCED BY EASEMENTS OR DRIVES		31 LNFT	
VEGETATED LANDSCAPE LENGTH		289 LNFT	
LARGE TREES REQUIRED	1 TREE/100'	3 TREES	
LARGE TREES PROVIDED		3 TREES	
MEDIUM/SMALL TREES REQUIRED	1 TREE/100'	3 TREES	
MEDIUM/SMALL TREES PROVIDED		3 TREES	
SHRUBS REQUIRED	1 SHRUB/5100'	21 SHRUBS	
SHRUBS PROVIDED		21 SHRUBS	
NORTH PROPERTY LINE			
ABUTTING USE	COM	COMMERCIAL	
	BUFFER TYPE	BUFFER WIDTH	BUFFER WALL REQUIRED
	Ø3	10'	NONE
BUFFER YARD LENGTH		329 LNFT	
REDUCED BY EASEMENTS OR DRIVES		Ø LNFT	
VEGETATED LANDSCAPE LENGTH		329 LNFT	
LARGE TREES REQUIRED	2 TREES/5100'	1 TREES	
LARGE TREES PROVIDED		1 TREES	
MEDIUM/SMALL TREES REQUIRED	4 TREES/100'	14 TREES	
MEDIUM/SMALL TREES PROVIDED		14 TREES	
SHRUBS REQUIRED	25 SHRUBS/100'	83 SHRUBS	
SHRUBS PROVIDED		83 SHRUBS	

WEST PROPERTY LINE				
ABUTTING USE	ROW		PUBLIC RIGHT-OF-WAY	
	BUFFER TYPE	BUFFER WIDTH WALL REQUIRED		
		0'	6'	NONE
INTERSTATE 15				
BUFFER YARD LENGTH				
REDUCED BY EASEMENTS OR DRIVES				
VEGETATED LANDSCAPE LENGTH				
LARGE TREES REQUIRED				
3 TREES/100'				
30 TREES				
LARGE TREES PROVIDED				
30 TREES				
SHRUBS REQUIRED (4' HT AT PLANTING)				
33 SHRUBS/100'				
330 SHRUBS				
SHRUBS PROVIDED				
330 SHRUBS				
NOTE: EXISTING TREES UTILIZED FOR BUFFER TREES				
SOUTH PROPERTY LINE				
ABUTTING USE	COM		COMMERCIAL	
	BUFFER TYPE	BUFFER WIDTH WALL REQUIRED		
		NO BUFFER	0'	NO
EAST PROPERTY LINE				
ABUTTING USE	COM		COMMERCIAL	
	BUFFER TYPE	BUFFER WIDTH WALL REQUIRED		
		NO BUFFER	0'	NO

MASTER PLANT LIST			
TREES			
QUANTITY	COMMON NAME	NAME	SPECIFICATION
3	DAHOON HOLLY	ILEX CASSINE	8' HT., 3" SFR., 1 1/2" CAL. MIN.
14	CREPE MYRTLE	LAGOSTROPHIA INDICA	8' HT., 3" SFR., 1 1/2" CAL. MIN.
3	MAGNOLIA	MAGNOLIA GRANDIFLORA	10' HT., 4" SFR., 2 1/2" CAL. MIN.
3	SLASH PINE	PINUS ELLIOTTI	8' HT., 2 1/2" CAL., 25 GAL. MIN.
20	LIVE OAK	QUERCUS VIRGINIANA	8' HT., 2 1/2" CAL., 25 GAL. MIN.
8	CHINESE ELM	ULMUS PARVIFOLIA	10' HT., 4" SFR., 2 1/2" CAL. MIN.
SHRUBS			
QUANTITY	COMMON NAME	NAME	SPECIFICATION
300	WAX MYRTLE	MYRTICA CERIFERA	24" HT., 1 GAL. MIN.
84	STOPPER	MYRACANTHES FRAGRANS	24" HT., 1 GAL. MIN.
SOD AND MULCH			
SOD	BAHIA SOD	PASPALLUM NOTATUM	SAND GROWN
MULCH	PINE STRAW MULCH		3" DEPTH ALL PLANTINGS

JOSEPH H. KELLEY, P.L.L.C.
LANDSCAPE ARCHITECTURE AND LAND PLANNING
3805 HANOVER ST., FORT MYERS, FL 33901
JOH@KELLEYDESIGN.COM/CA\$H.NET
239-940-3065

JOSEPH H. KELLEY, P.L.L.C.
20202 W. BAYVIEW BLVD. #1000
FORT MYERS, FL 33907

POOL CORP
LAUREL ROAD, VENICE, FLORIDA
COMMERCIAL DEVELOPMENT
CODE REQUIRED MINIMUM LANDSCAPE PLAN

DATE: 02/21/2023
DRAWN BY: JOSEPH KELLEY
FILE NAME: POOLCORP-LS-V4.DWG
REVISION NOTES:
05.04.23 ADD SITE LIGHTING
09.14.23 PER REVIEW
10.02.23 PER REVIEW


SHEET NUMBER:
L-1
1 OF 5



7.5 (SR 93)
VARIES

TREE SURVEY LEGEND

	EXISTING SABAL PALM TO BE REMOVED
	EXISTING SABAL PALM TO BE RETAINED
	EXISTING PINE TREE TO BE REMOVED
	EXISTING PINE TREE TO BE RETAINED
	EXISTING OAK TREE TO BE REMOVED
	EXISTING OAK TREE TO BE RETAINED

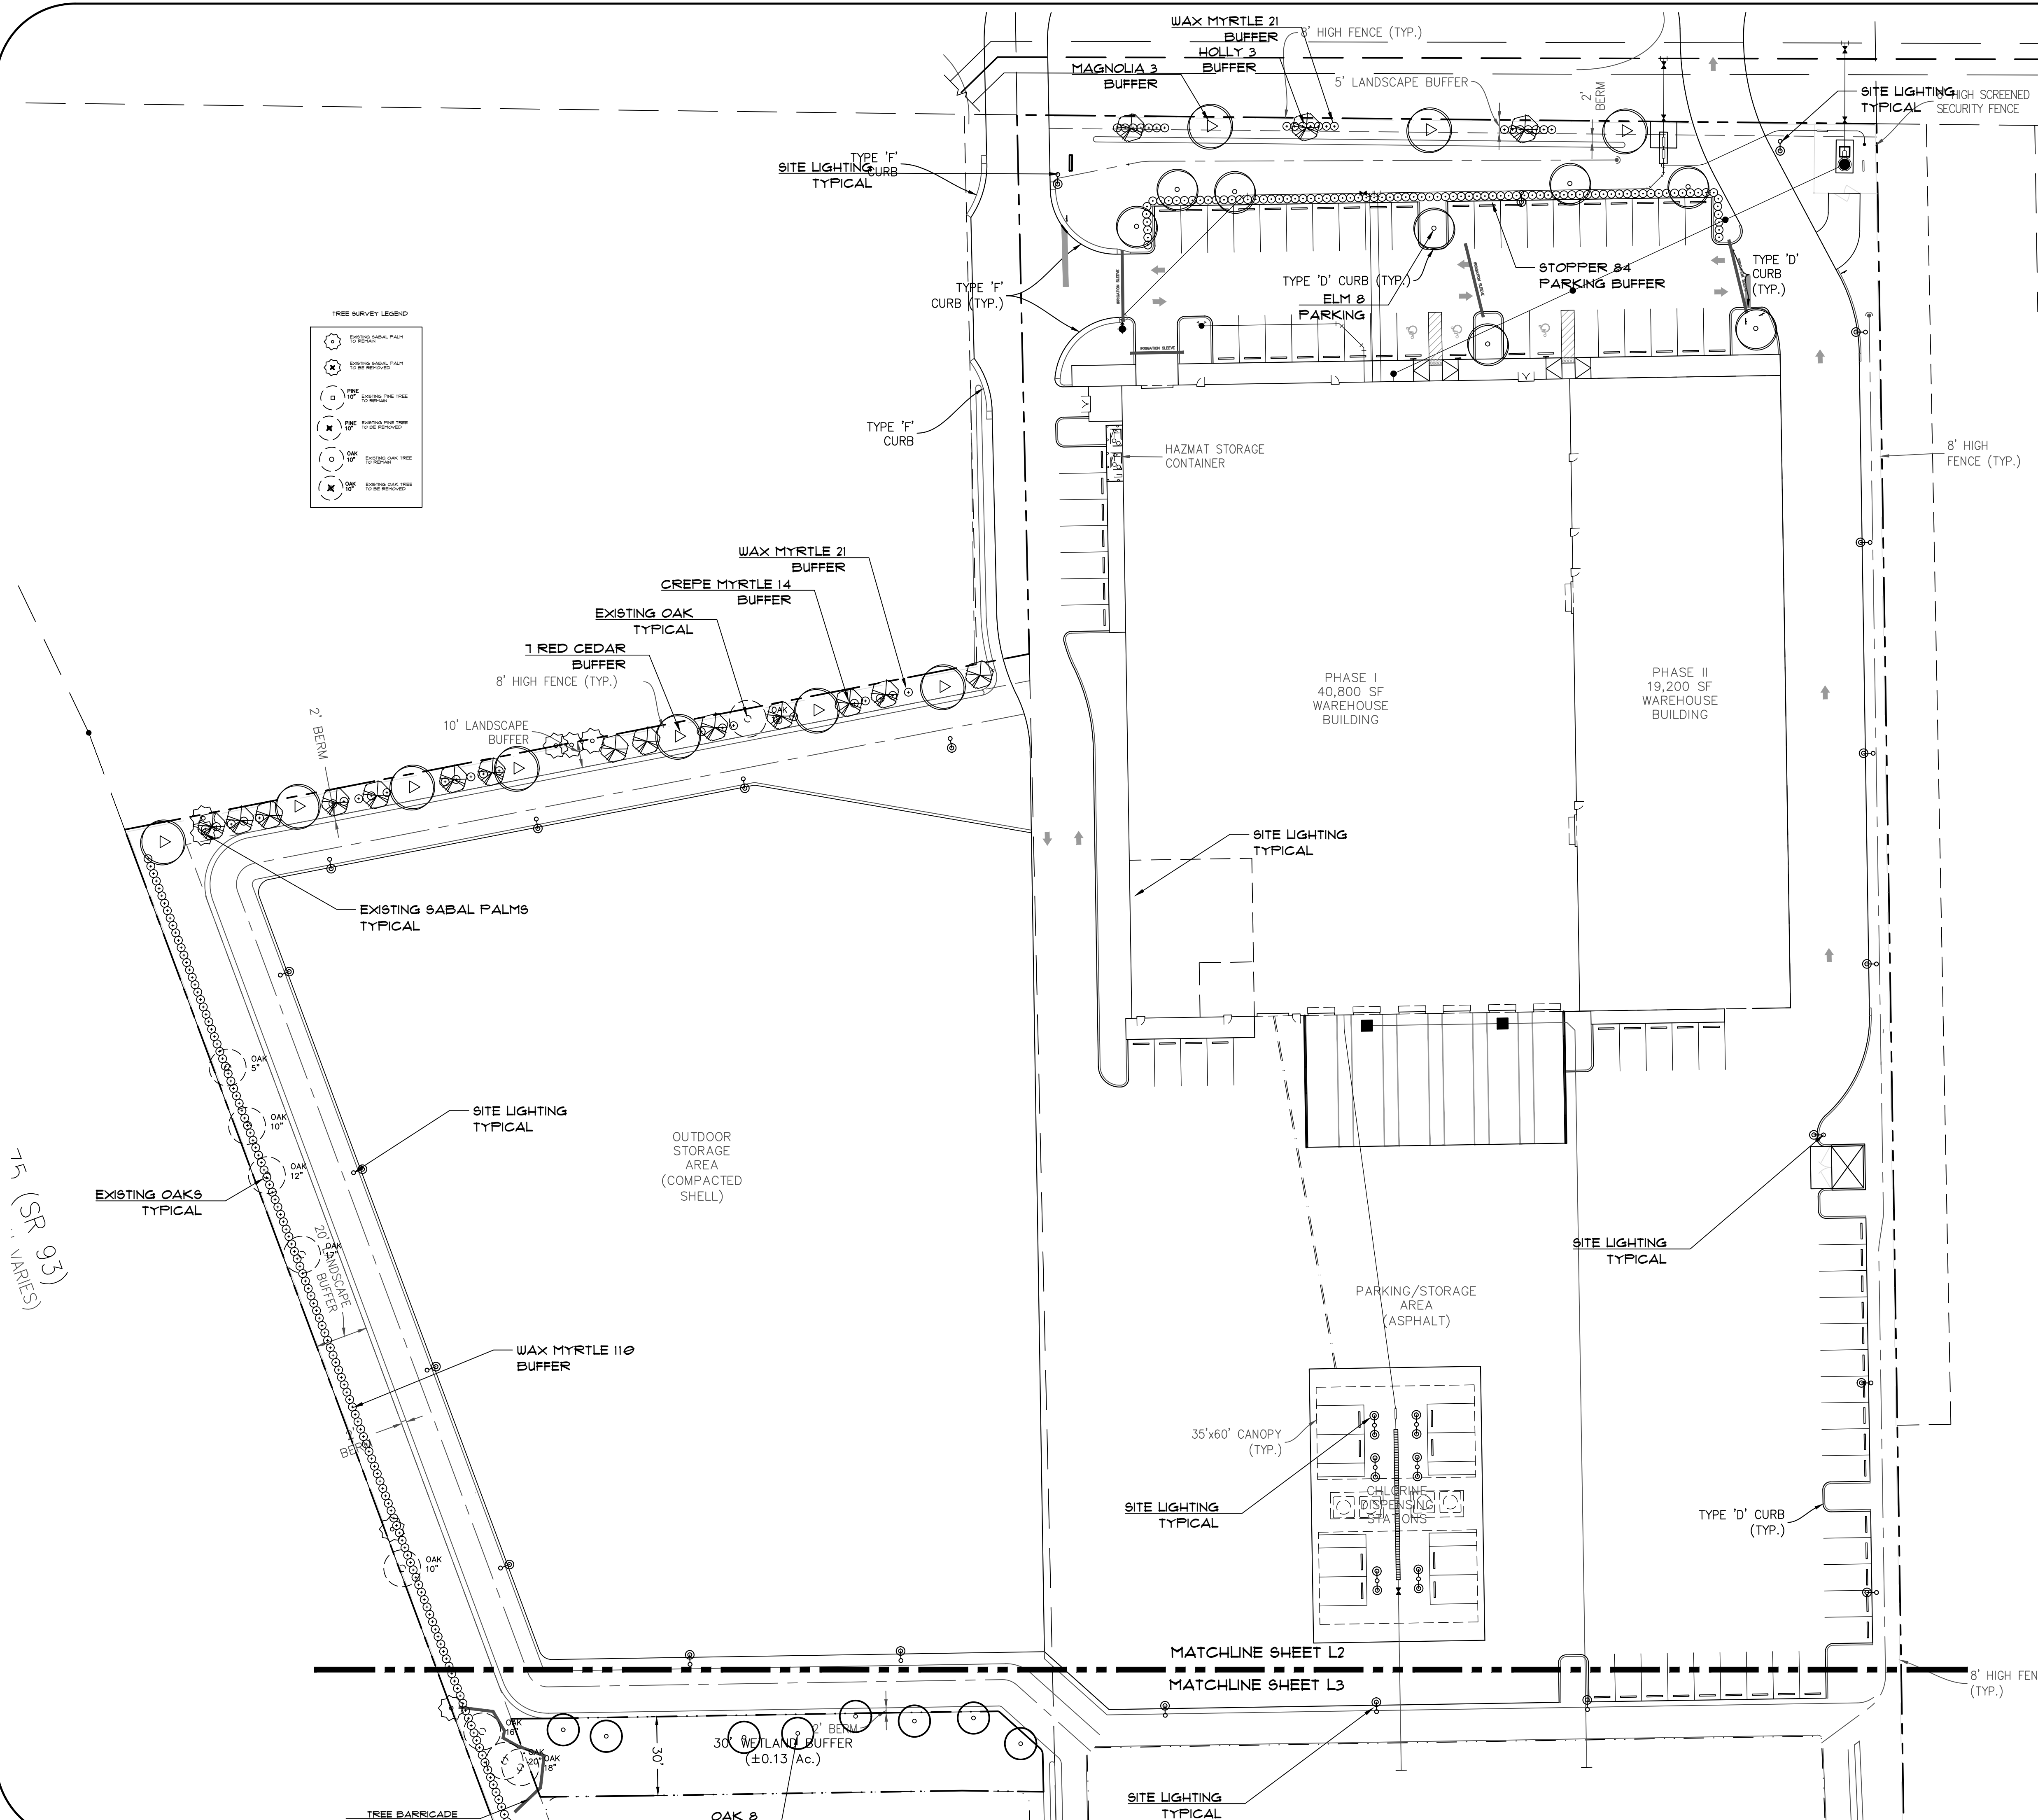

MASTER PLANT LIST

TREES			
QUANTITY	COMMON NAME	NAME	SPECIFICATION
3	DAHOON HOLLY	ILEX CASSINE	8' HT., 3" SFR., 1.5" CAL. MIN.
14	CREPE MYRTLE	LAGOSTROMEA INDICA	8' HT., 3" SFR., 1.5" CAL. MIN.
3	MAGNOLIA	MAGNOLIA GRANDIFLORA	10' HT., 4" SFR., 2.5" CAL. MIN.
4	SLUSH PINE	PINUS ELLIOTTI	8' HT., 2.5" CAL., 25 GAL. MIN.
20	LIVE OAK	QUERCUS VIRGINIANA	8' HT., 2.5" CAL., 25 GAL. MIN.
8	CHINESE ELM	ULMUS FAVIFOLIA	10' HT., 4" SFR., 2.5" CAL. MIN.
SHRUBS			
QUANTITY	COMMON NAME	NAME	SPECIFICATION
369	WAX MYRTLE	MYRTICA CERIFERA	24" HT., 1 GAL. MIN.
84	STOPPER	MYRTAGANTHES FRAGRANS	24" HT., 1 GAL. MIN.
SOD AND MULCH			
SOD	BAHIA SOD	PASPALUM NOTATUM	SAND GROWN
MULCH	FINE STRAW MULCH		3" DEPTH ALL PLANTINGS

DATE: 02/21/2023
DRAWN BY: JOSH KELLEY
FILE NAME: POOLCORP-LS-V4.DWG
REVISION NOTES:
05.04.23 ADD SITE LIGHTING
09.14.23 PER REVIEW
10.02.23 PER REVIEW

SHEET NUMBER:
L-2
2 OF 5

JOSEPH H. KELLEY, P.L.A., LLC
LANDSCAPE ARCHITECTURE AND LAND PLANNING
3605 HANOVER ST., FORT MYERS, FL 33901
JOH@KELLEYDESIGN.COM | 239-940-3065

JOSEPH H. KELLEY, P.L.A.
LANDSCAPE ARCHITECTURE AND LAND PLANNING

POOL CORP
LAUREL ROAD, VENICE, FLORIDA
COMMERCIAL DEVELOPMENT
CODE REQUIRED MINIMUM LANDSCAPE PLAN

POOL CORP
LAUREL ROAD, VENICE, FLORIDA
COMMERCIAL DEVELOPMENT
CODE REQUIRED MINIMUM LANDSCAPE PLAN

DATE: 02/21/2023
DRAWN BY: JOSH KELLEY


FILE NAME:
POOLCORP-LS-V4.DWG

REVISION NOTES:

05.04.23 ADD SITE LIGHTING
09.14.23 PER REVIEW
10.02.23 PER REVIEW

SHEET NUMBER:


L-3
3 OF 5

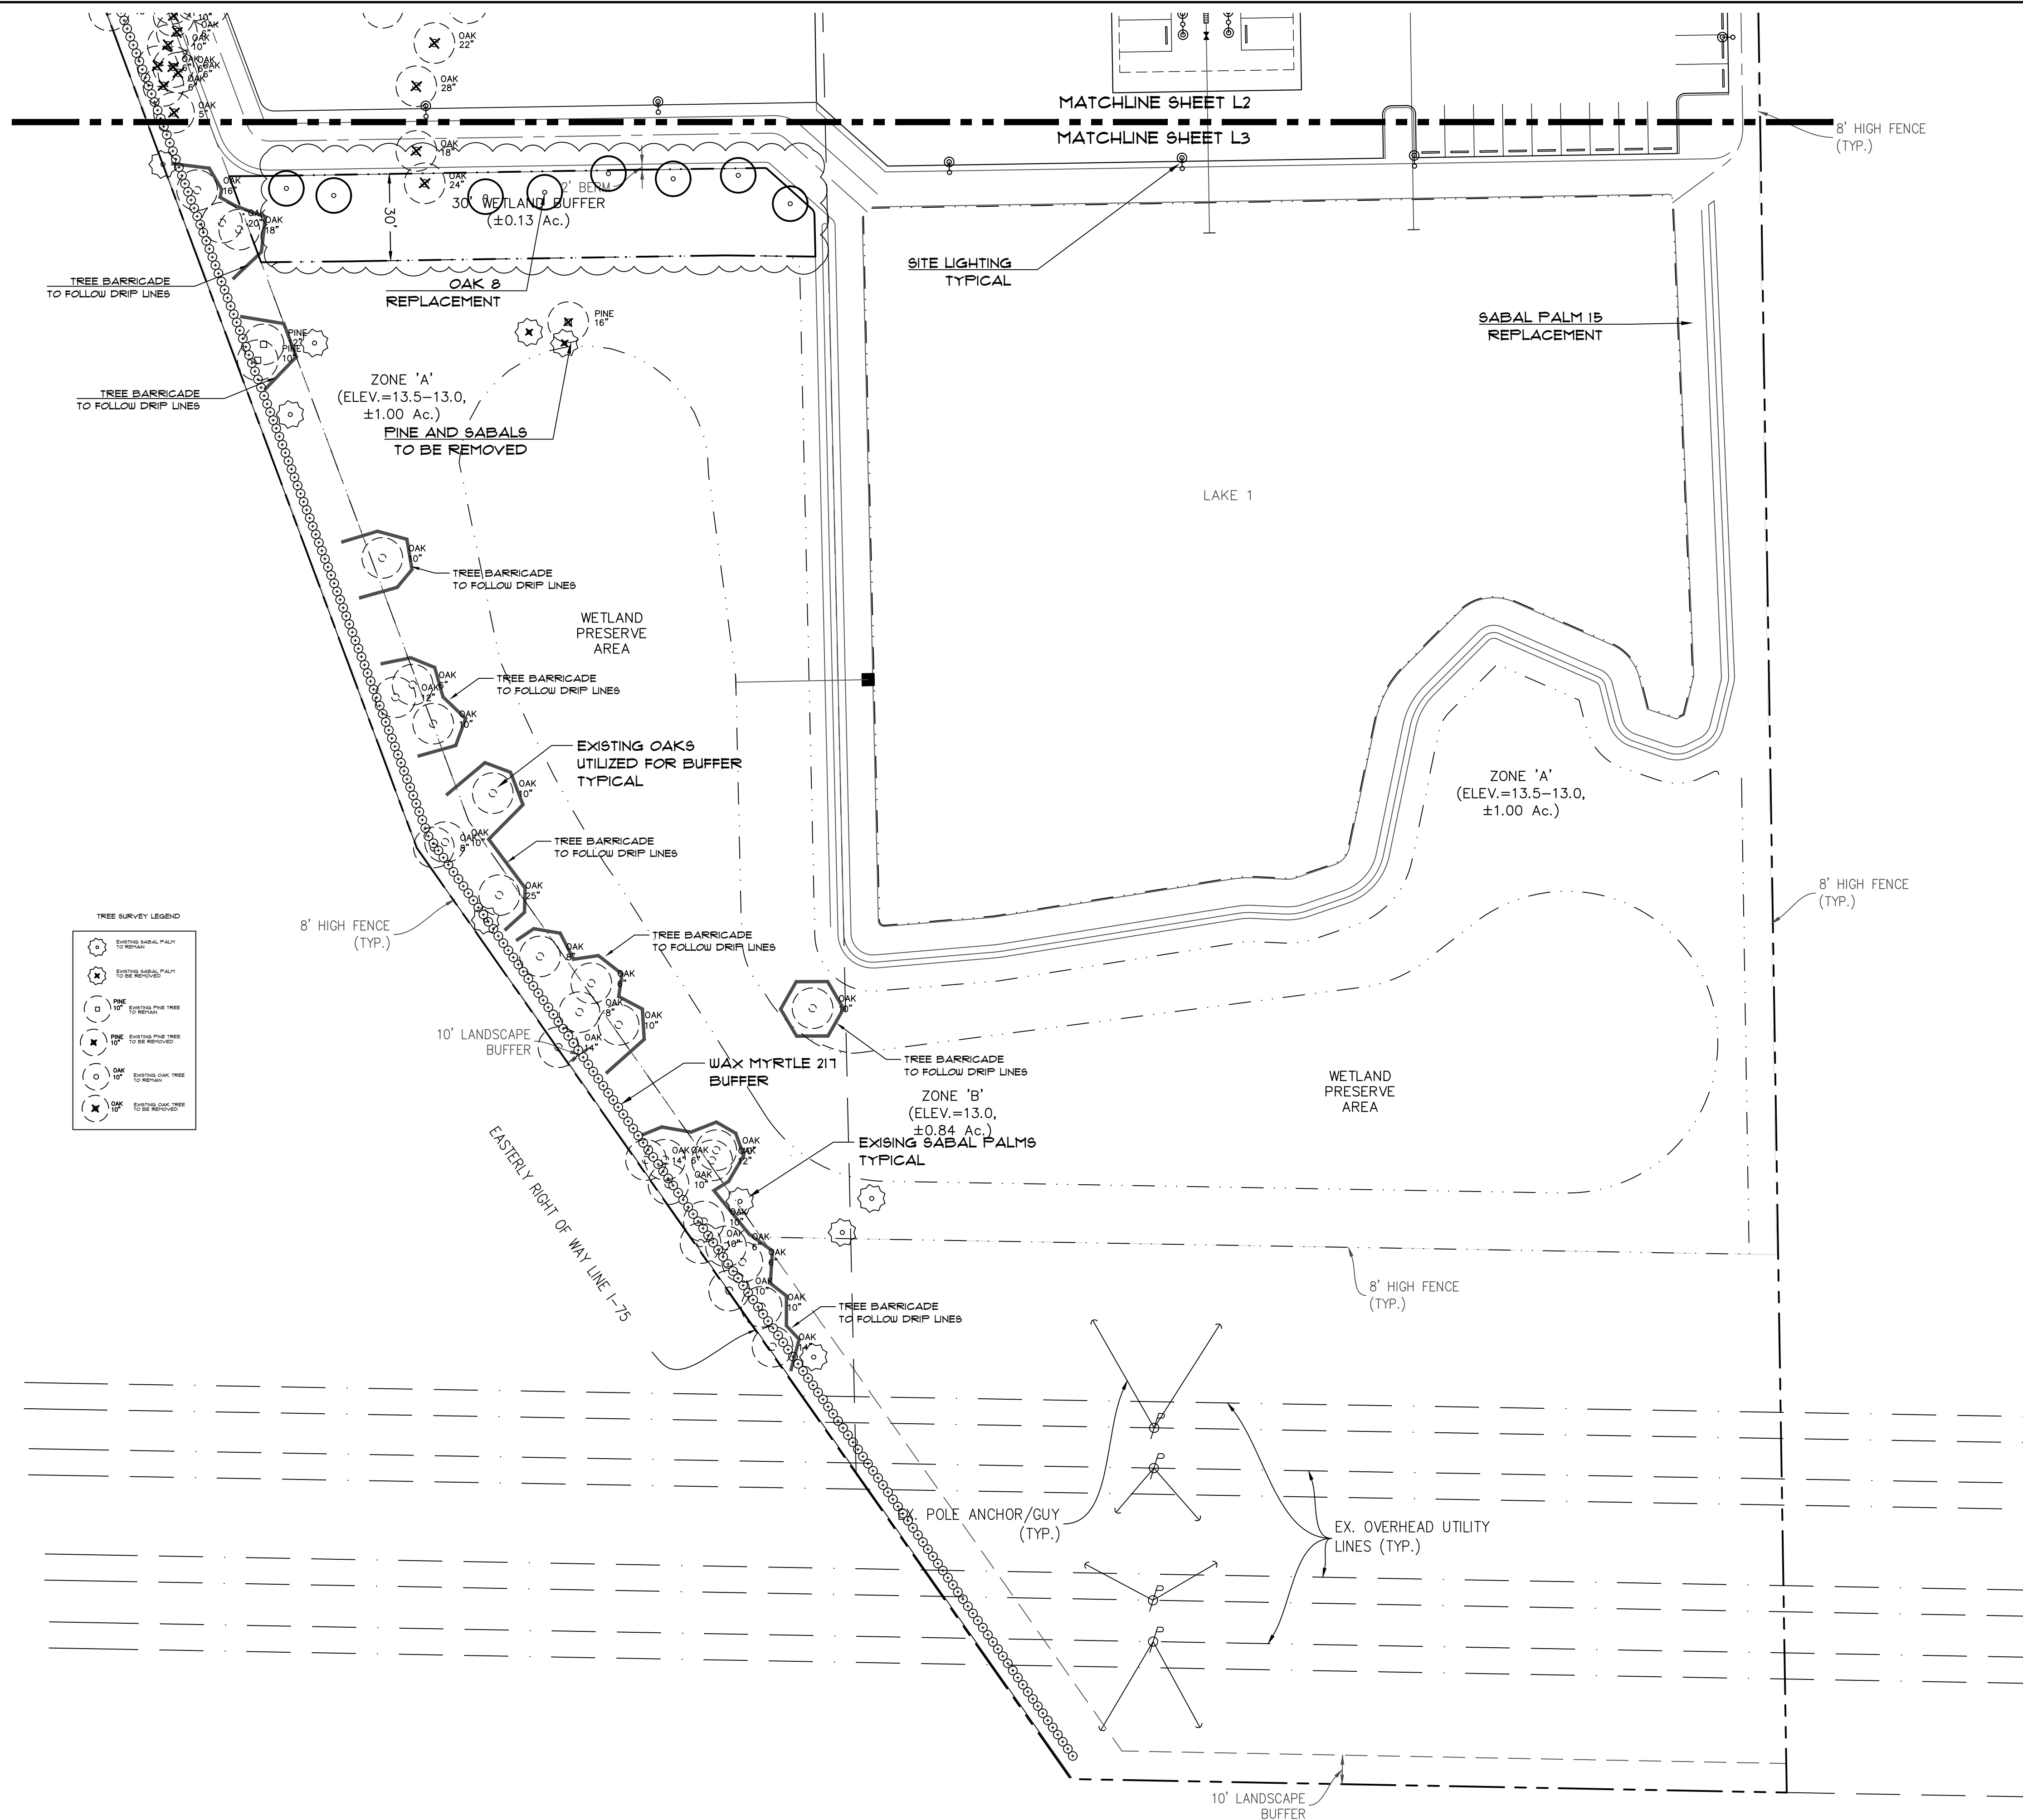


TREE SURVEY LEGEND

	EXISTING SABAL PALM TO BE REMOVED
	EXISTING PINE TREE TO BE REMOVED
	EXISTING OAK TREE TO BE REMOVED
	EXISTING SABAL PALM TO BE RETAINED
	EXISTING PINE TREE TO BE RETAINED
	EXISTING OAK TREE TO BE RETAINED

MASTER PLANT LIST			
TREES			
QUANTITY	COMMON NAME	NAME	SPECIFICATION
3	DAHON HOLLY	ILEX CASSINE	8' HT., 3" SPR., 1.5" GAL. MIN.
14	CREPE MYRTLE	LAGOSTROMEA INDICA	8' HT., 3" SPR., 1.5" GAL. MIN.
3	MAGNOLIA	MAGNOLIA GRANDIFLORA	10' HT., 4" SPR., 2.5" GAL. MIN.
4	SLASH PINE	PINUS ELLIOTTI	8' HT., 2.5" GAL., 25 GAL. MIN.
20	LIVE OAK	QUERCUS VIRGINIANA	8' HT., 2.5" GAL., 25 GAL. MIN.
8	CHINESE ELM	ULMUS PARVIFOLIA	10' HT., 4" SPR., 2.5" GAL. MIN.
SHRUBS			
QUANTITY	COMMON NAME	NAME	SPECIFICATION
363	WAX MYRTLE	MYRTICA CERIFERA	24" HT., 1 GAL. MIN.
84	STOPPER	MYRACANTHES FRAGRANS	24" HT., 1 GAL. MIN.
SOD AND MULCH			
SOD	BAHIA SOD	PASPALUM NOTATUM	SAND GROWN
MULCH	FINE STRAW MULCH		3" DEPTH ALL PLANTINGS

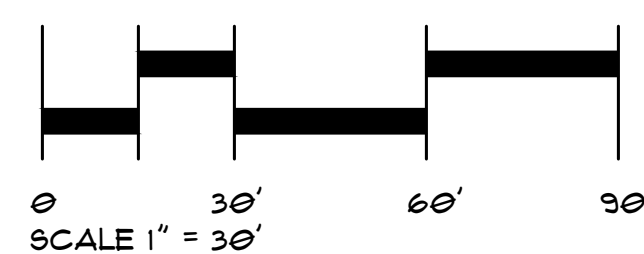

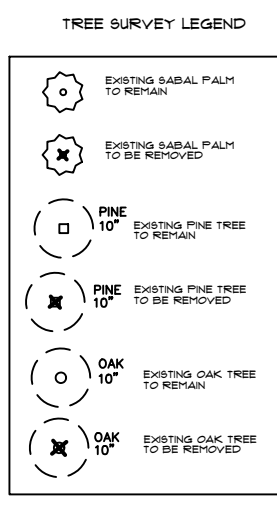


EXISTING TREES TO REMAIN	
SPECIES	CALIPER
'OAK'	5
'OAK'	6
'OAK'	6
'OAK'	6
'OAK'	6
'OAK'	6
'OAK'	8
'OAK'	8
'OAK'	8
'OAK'	10
'OAK'	10
'OAK'	10
'OAK'	10
'OAK'	10
'OAK'	10
'OAK'	10
'OAK'	10
'OAK'	10
'OAK'	10
'OAK'	10
'OAK'	10
'OAK'	10
'OAK'	12
'OAK'	12
'OAK'	12
'OAK'	12
'OAK'	14
'OAK'	14
'OAK'	14
'OAK'	16
'OAK'	17
'OAK'	18
'OAK'	20
'OAK'	25
TOTAL CALIPER INCHES OAKS	385
'PINE'	10
'PINE'	12
TOTAL CALIPER INCHES PINES	22
TOTAL TREE CALIPER INCHES TO REMAIN	
	407
SABAL PALMS TO BE REMAIN	14




IRRIGATION NOTES:

1. IRRIGATION SYSTEM TO BE INSTALLED TO PROVIDE 100% COVERAGE (HEAD TO HEAD) TO CODE REQUIRED PLANTINGS.
2. IRRIGATION CONNECTION SHALL BE DETERMINED BY OWNER.
3. DRY RETENTION AREAS SHALL BE IRRIGATED FROM THE TOP OF BANK TO THE BOTTOM OF THE SLOPE ONLY.
4. PARKING ISLANDS AND BUILDING PERIMETER PLANTINGS SHALL HAVE SPRAY TYPE HEADS OR FLOOD BUBBLER TYPE IRRIGATION.
5. CONTRACTOR TO DETERMINE IRRIGATION ZONE DELINEATION AND PIPE SIZING TO INSURE WATER VELOCITY SHALL NOT EXCEED 5 FEET PER SECOND THROUGH ANY PIPING OR IRRIGATION COMPONENT.
6. ALL IRRIGATION PIPING INSTALLED UNDER PAVEMENT SHALL BE INSTALLED IN SLEEVES EITHER EXISTING OR ADDED AS PART OF THE RENOVATION.
7. THIS PLAN IS SCHEMATIC IN NATURE. COMPONENTS ARE SHOWN FOR CLARITY. ACTUAL LOCATION OF COMPONENTS MAY VARY DUE TO FIELD CONDITIONS.
8. FUTURE DEVELOPMENT AREA SHALL NOT BE IRRIGATED.

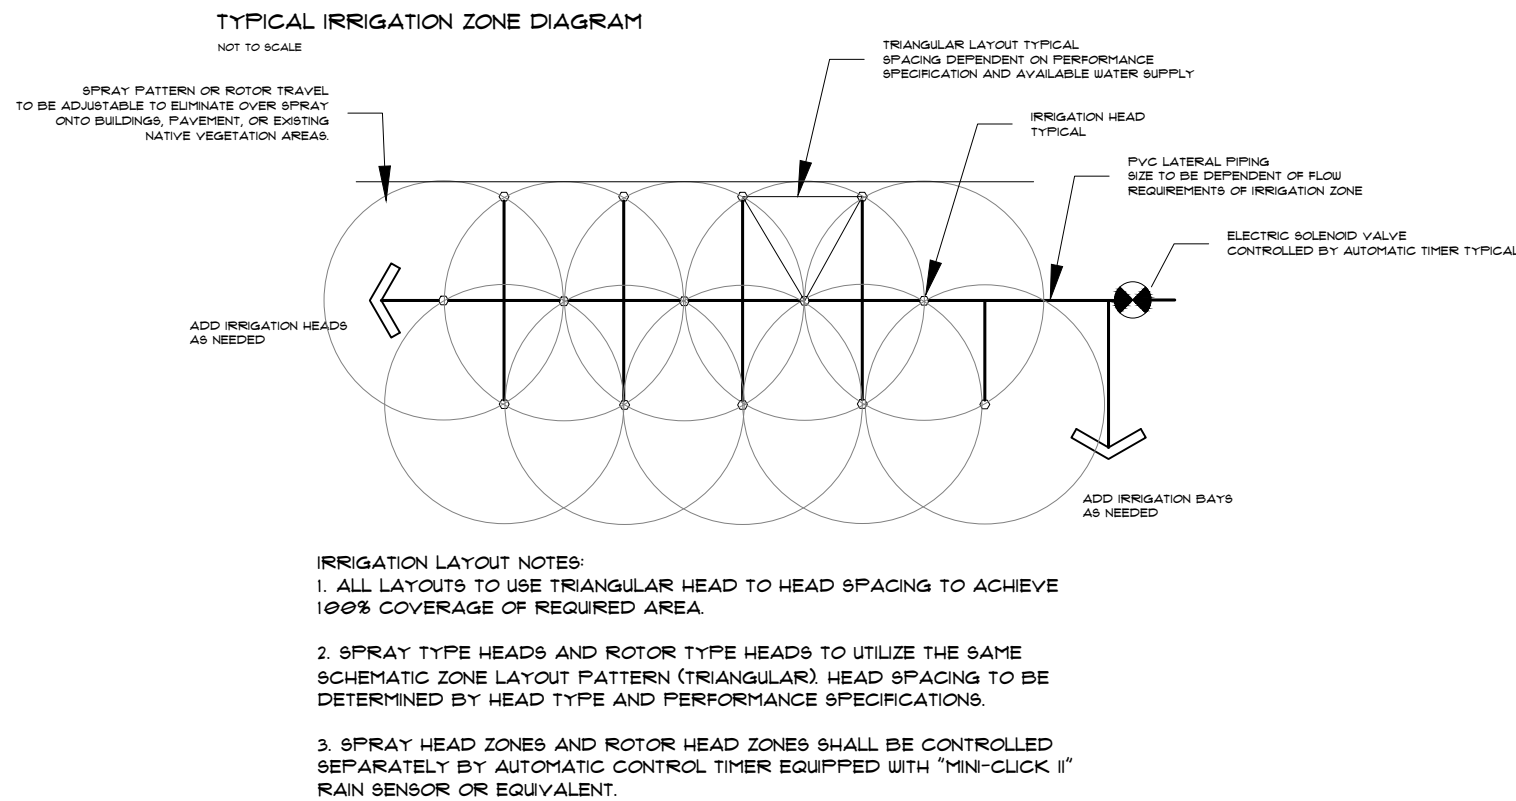

GENERAL PLANTING NOTES






1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE LOCATION OF ALL UTILITIES AND SERVICES BOTH UNDERGROUND AND OVERHEAD PRIOR TO THE COMMENCEMENT OF WORK. PROTECTION OF ALL UTILITIES AND SERVICES THROUGHOUT THE COURSE OF WORK IS EXPECTED.
2. SOD USED ON THIS PROJECT SHALL BE BAHIA (PASPALUM NOTATUM) AND BE PROVIDED THROUGHOUT. SEEDING MAY BE PROVIDED WHERE APPROPRIATE. ALL SWALES AND DRAINAGE SYSTEM BERRIS SHALL BE SODDED UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
3. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO FINISH GRADE ALL LANDSCAPE AREAS ELIMINATING ALL BUMPS, DEPRESSIONS, ROCKS, STICKS, OR OTHER DEBRIS PRIOR TO THE INSTALLATION OF PLANT MATERIAL. THE CONTRACTOR SHALL ALSO BE RESPONSIBLE FOR MAINTAINING POSITIVE SHEET FLOW DRAINAGE AWAY FROM ALL STRUCTURES AND TO ALL DRAINAGE WAYS SHOWN OR IMPLIED ON THE DRAWINGS.
4. COORDINATE ALL WORK WITH ALL TRADES SO AS TO AVOID ANY CONFLICT WITH THE EXECUTION OF WORK BY OTHERS. OWNER SHALL NOT BE RESPONSIBLE FOR THE DAMAGE TO PLANT MATERIALS CAUSED BY OTHER TRADES OR SUBCONTRACTORS. THE CONDITION OF PLANT MATERIAL SHALL BE IN ACCORDANCE TO THE QUALITY STANDARDS DEFINED HEREIN AT THE TIME OF FINAL.
5. THE CONTRACTOR SHALL PROVIDE A GUARANTEE AND WARRANT ALL WORKMANSHIP AND PLANT MATERIALS FOR A PERIOD OF NOT LESS THAN ONE (1) YEAR FROM FINAL ACCEPTANCE.

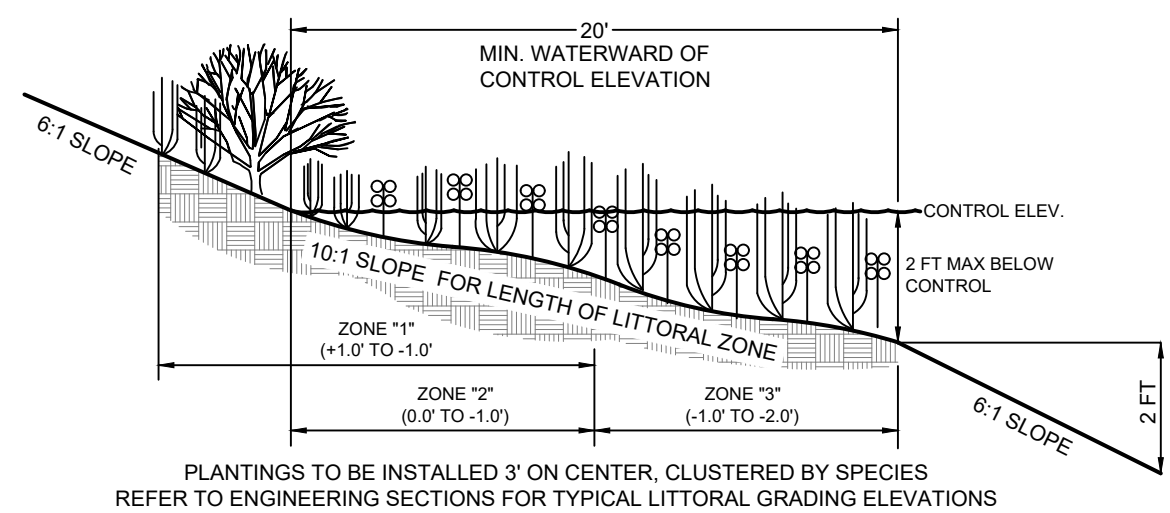

ARTICLE 9 SEC. 124-1118 LITTORAL ZONES			
LAKE AREA	5,132	8QFT	
30% OF SURFACE AREA REQUIRED AS LITTORAL ZONES	1,539	8QFT	
HERBACEOUS PLANTS REQUIRED 3' ON CENTER PLANTING	1,311	PLANTS	
HERBACEOUS PLANTS PROVIDED	2,100	PLANTS	

NOTE: INITIAL PLANTING SHALL INCLUDE AT LEAST THREE DIFFERENT HERBACEOUS PERENNIAL NATIVE SPECIES FOR EACH LITTORAL ZONE. NO SPECIES SHALL CONSTITUTE MORE THAN 50 PERCENT OF THE NUMBER OF PLANTS TO BE PLANTED.

LAKE LITTORAL PLANT LIST				
NAME	COMMON NAME	QUANTITY	SIZE	SPACING NATIVE
PORTULACA OORDATA	PORTULACA	5000	4" LINER	36" OC NATIVE
SCIRPUS SP.	BULRUSH	5000	4" LINER	36" OC NATIVE
SAGITTARIA LATIFOLIA	ARROWHEAD	5000	4" LINER	36" OC NATIVE
THALIA GENICULATA	FIRE FLAG	5000	4" LINER	36" OC NATIVE
BLECHNUM BERRILLATUM	SWAMP FERN	1000	1 GALLON	5' OC NATIVE
SPARTINA BAKERII	SAND CORDGRASS	1000	1 GALLON	5' OC NATIVE

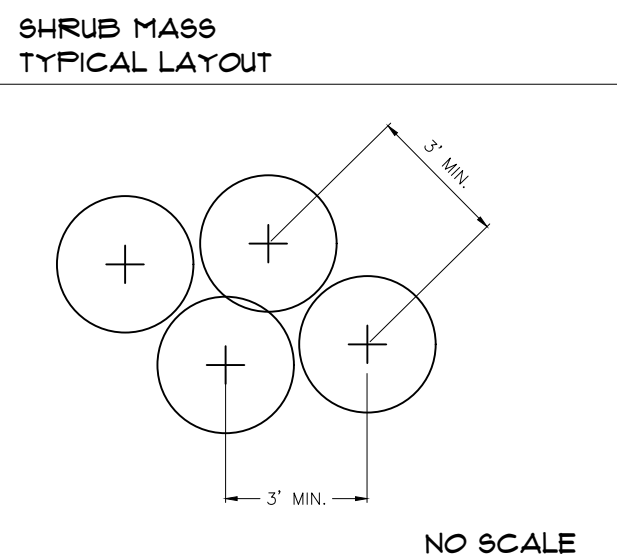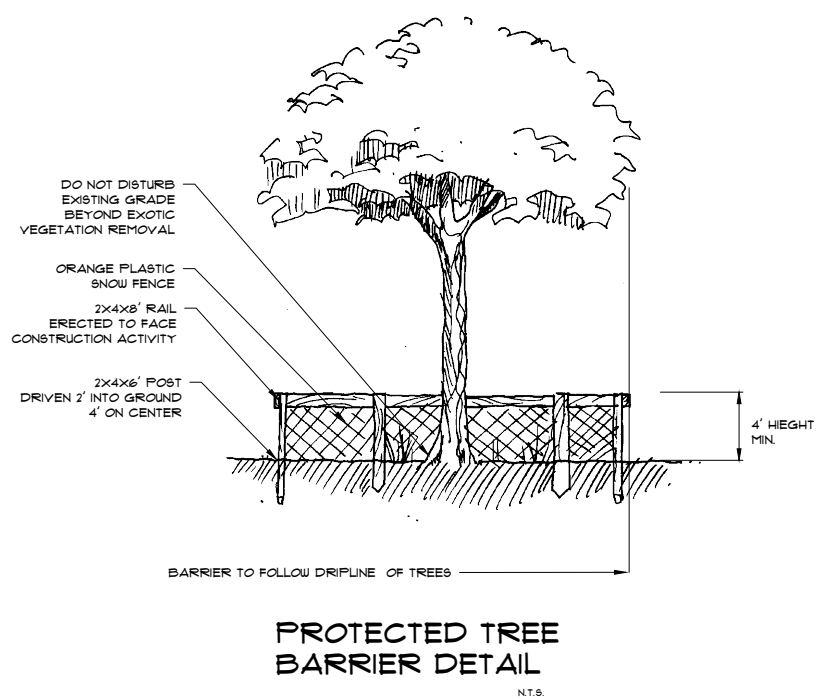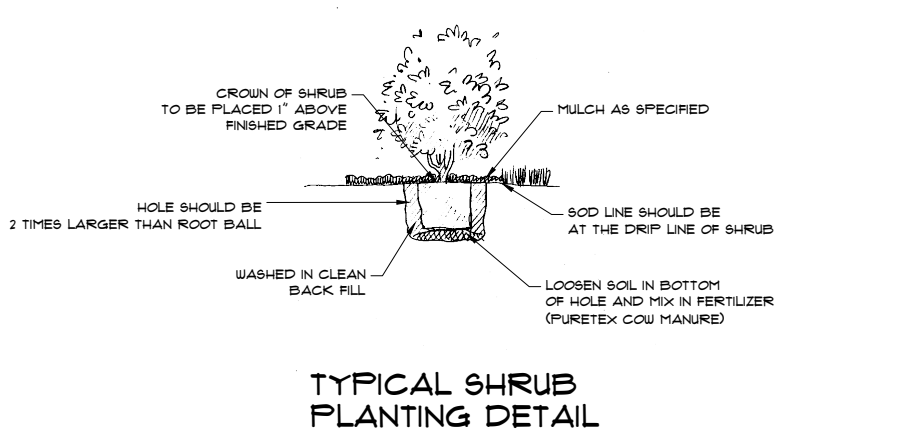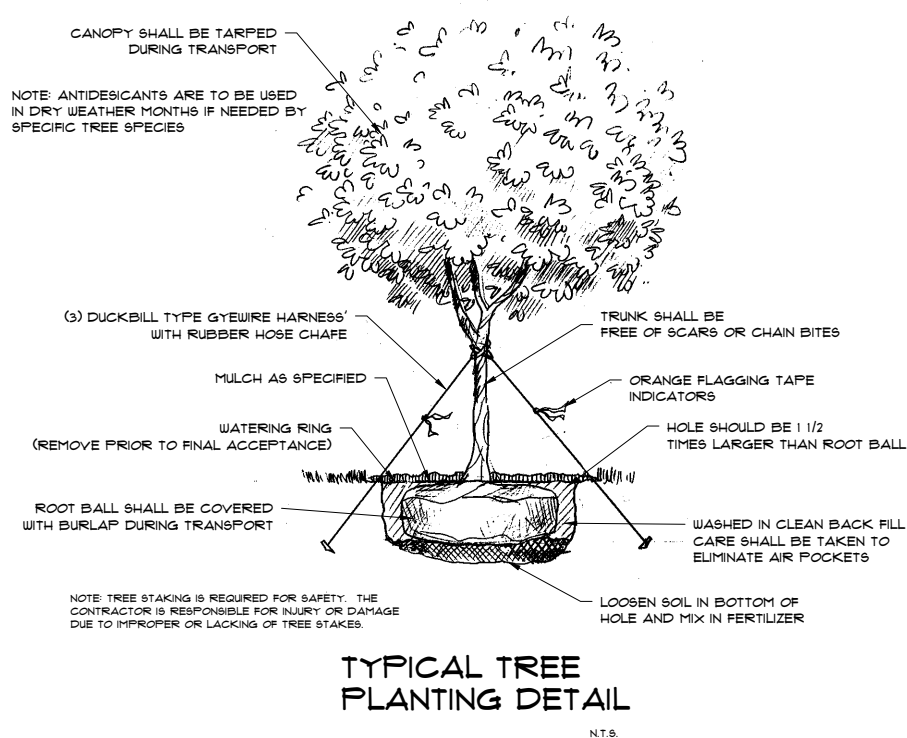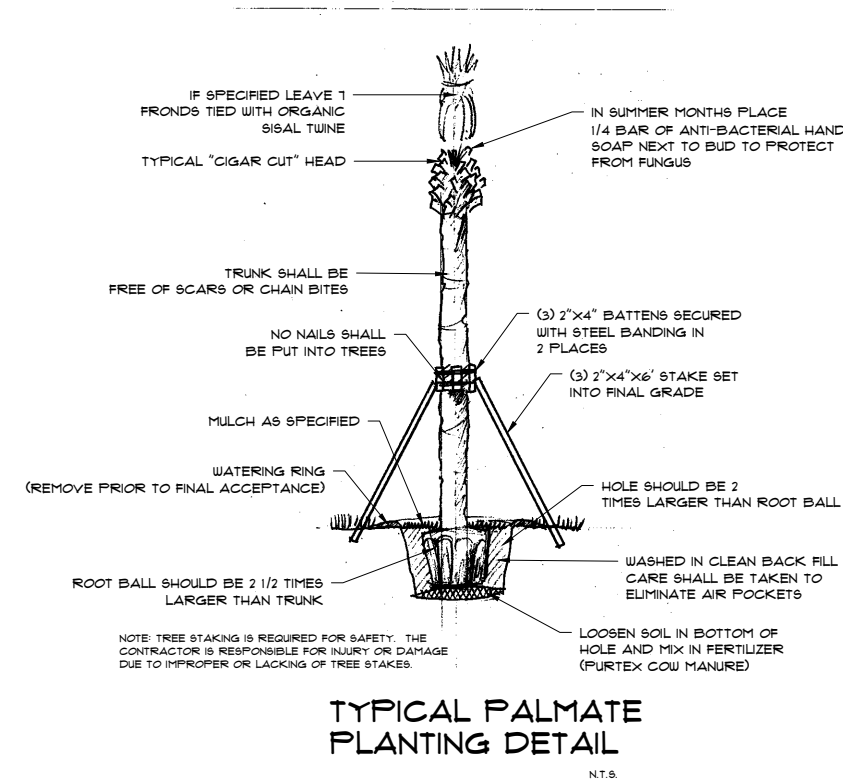

LAND DEVELOPMENT CODE REQUIREMENTS

1. ALL LANDSCAPE MATERIALS DELINEATED, IMPLIED, OR COMMITTED TO THAT ARE INTENDED TO MEET THE REQUIREMENTS OF THE VENICE LDC, SHALL NOT BE INSTALLED WITHIN EASEMENTS, RIGHT-OF-WAYS, STORMWATER CONVEYANCE AREAS UNLESS OTHERWISE AGREED TO OR STATED WITHIN ZONING RESOLUTIONS.
2. ALL TREES PROVIDED IN COMPLIANCE TO THE VENICE LDC REQUIREMENTS SHALL BE A MINIMUM OF TEN FEET (10') IN HEIGHT, HAVE A FOUR FOOT (4') SPREAD, AND A TWO AND HALF INCH (2.5") INCH CALIPER MEASURED TWELVE INCHES (12") FROM THE GROUND AT THE TIME OF PLANTING. MEDIUM AND SMALL UNDERSTORY TREES (LESS THAN 30' MATURE HT.) MUST HAVE A MINIMUM CALIPER OF ONE AND ONE HALF INCH (1.5") MEASURED SIX INCHES (6") FROM THE SOIL.
3. ALL SHRUBS PROVIDED IN COMPLIANCE TO THE VENICE LDC REQUIREMENTS SHALL BE AT A MINIMUM TWENTY-FOUR INCHES (24") IN HEIGHT, BE IN A MINIMUM THREE GALLON (3G) CONTAINER, AND BE SPACED NO MORE THAN EIGHTEEN INCHES (18") TO THIRTY-SIX INCHES (36") ON CENTER (OC).
4. AT LEAST 50 PERCENT OF SHRUBS USED TO FULFILL VENICE REQUIREMENTS MUST BE NATIVE FLORIDA SPECIES.
5. ORGANIC MULCH (NO STONE, CHIPPED TIRES, OR SHELL) SHALL BE REQUIRED IN ALL PLANTING AREAS AND SHALL BE APPLIED NO LESS THAN TWO INCHES (2") IN DEPTH AT THE TIME OF PLANTING. ALL TREES AND PALMS OUTSIDE OF BEDDING AREAS SHALL HAVE A MULCH RING NOT LESS THAN TWENTY-FOUR INCHES (24") BEYOND THE TRUNK IN ALL DIRECTIONS AT THE SPECIFIED DEPTH OF TWO INCHES (2"). THE USE OF CYFRESS MULCH IS DISCOURAGED.
6. THE CONTRACTOR SHALL PROVIDE AND MAINTAIN THROUGH FINAL ACCEPTANCE (CERTIFICATE OF COMPLIANCE) A TREE PROTECTION BARRIER FOR ALL INDIVIDUAL OR MASSES OF INDIGENEOUS PLANT MATERIALS BEING CREDITED AND/OR PRESERVED.
7. IF ANY PROTECTED TREE DIES WITHIN THREE (3) YEARS FROM THE ISSUANCE OF A CERTIFICATE OF COMPLIANCE (CC), THEY MUST BE REPLACED BY THE NUMBER OF TREE CREDITS TAKEN (NORMALLY 5) AND AT THE MINIMUM SIZES AND VARIETIES SPECIED BY CODE OR HEREIN.
8. PLANT MATERIAL PROVIDED IN COMPLIANCE TO THE VENICE LDC MAY ONLY BE PRUNED TO PROMOTE HEALTHY, UNIFORM, AND NATURAL GROWTH OF THE SPECIFIC PLANT (EXCEPT WHERE NECESSARY TO PROMOTE PUBLIC HEALTH, SAFETY, AND WELFARE). PRUNING MUST BE IN ACCORDANCE TO AND ACCEPTABLE WITH THE "PRUNING STANDARDS" (LATEST EDITION) ISSUED BY THE "NATIONAL ARBORIST ASSOCIATION". SEVERELY PRUNED AND/OR DAMAGED TREES MUST BE REPLACED. "HAT-RACKING" PRACTICES ARE PROHIBITED.
9. PLANT MATERIAL PROVIDED IN COMPLIANCE TO THE VENICE LDC SHALL BE AT A MINIMUM, MEET THE STANDARDS FOR FLORIDA NO. 1 AS DEFINED BY "GRADES AND STANDARDS, PARTS 1 & 2, FLORIDA DEPARTMENT OF AGRICULTURE, LATEST EDITION. SEE PLANT SCHEDULE FOR SPECIFIC QUALITY SPECS.
10. THE CONTRACTOR SHALL BE REQUIRED TO MAINTAIN SAFE SIGHT DISTANCE TRIANGLES AT ALL INTERSECTIONS AND VEHICULAR CONNECTIONS. SIGHT TRIANGLES MUST BE IN ACCORDANCE WITH THE ROADSIDE RECOVERY AREA PROVISIONS OF THE FDOT GREEN BOOK. ALL SIGHT TRIANGLES SHALL MAINTAIN A CLEAR ZONE BETWEEN THIRTY-SIX INCHES (36") AND EIGHT FEET (8'). CONTRACTOR TO VERIFY PRIOR TO FINAL ACCEPTANCE.

TYPICAL AND SPECIFIC CONSTRUCTION STANDARDS:

11. ALL PLANTING AREAS SHALL BE PROPERLY PREPARED TO RECEIVE PLANT MATERIAL PRIOR TO INSTALLATION. PLANTING AREAS WITH BOULDERS (OVER 4" IN DIA.) AND BASE ROCK (LIMESTONE) WILL NOT BE ACCEPTED AND MUST BE RECTIFIED PRIOR TO CERTIFICATION. ALL FINISHED GRADES SHALL BE WITHIN TWO INCHES (2") OF ALL TRANSITIONS (I.E. WALKS, CURBS, ETC.) NO EXPOSED SURFACES AT FINAL GRADE GREATER THAN TWO INCHES (2") WILL BE ACCEPTED (SEE DETAIL). ONCE SOD AND MULCH ARE APPLIED, ALL TRANSITIONS SHALL BE EVEN, SMOOTH, CONSISTENT, AND WITHOUT INTERRUPTION.
12. ALL EXOTIC PLANT SPECIES, HEREIN DEFINED, SHALL BE PHYSICALLY REMOVED FROM THE SITE. LARGE STUMPS ARE TO BE GROUND (MINIMUM 24" BELOW GRADE) OR REMOVED. SMALLER STUMPS (LESS THAN 6" DIA) MAY BE CUT TO GROUND LEVEL AND TREATED.

IRRIGATION REQUIREMENTS:

- TO IMPROVE THE SURVIVABILITY OF REQUIRED LANDSCAPING, CULTIVATED LANDSCAPE AREAS MUST BE PROVIDED WITH AN AUTOMATIC IRRIGATION SYSTEM. ALL REQUIRED IRRIGATION SYSTEMS MUST BE DESIGNED TO ELIMINATE THE APPLICATION OF WATER TO IMPERVIOUS AREAS, INCLUDING ROADS, DRIVES AND OTHER VEHICLE AREAS. REQUIRED IRRIGATION MUST ALSO BE DESIGNED TO AVOID IMPACTS ON EXISTING NATIVE VEGETATION.

ALL NEW DEVELOPMENTS THAT HAVE REQUIRED LANDSCAPING MUST BE IRRIGATED BY THE USE OF AN AUTOMATIC IRRIGATION SYSTEM WITH CONTROLLER SET TO CONSERVE WATER. MOISTURE DETECTION DEVICES MUST BE INSTALLED IN ALL AUTOMATIC SPRINKLER SYSTEMS TO OVERRIDE THE SPRINKLER ACTIVATION MECHANISM DURING PERIODS OF INCREASED RAINFALL. WHERE EXISTING IRRIGATION SYSTEMS ARE MODIFIED REQUIRING THE ACQUISITION OF A PERMIT, AUTOMATIC ACTIVATION SYSTEMS AND OVERRIDING MOISTURE DETECTION DEVICES MUST BE INSTALLED.

TABLE 1: Undesirable Vegetation with a Management Goal of 0% And Maintenance Level of 5% Cover

SCIENTIFIC NAME	COMMON NAME	MANAGEMENT GOAL (% Cover)	MAINTENANCE LEVEL (% Cover)
Acacia auriculiformis	earleaf acacia	0	<5
Albizia lebeck	woman's tongue	0	<5
Ardisia crenata	coral ardisia	0	<5
Bischofia javanica	Javanese Bishopwood	0	<5
Broussonetia papyrifera	Paper mulberry	0	<5
Casuarina equisetifolia	Australian pine	0	<5
Casuarina glauca	suckering Australian pine	0	<5
Cinnamomum camphora	camphor tree	0	<5
Colocasia esculenta	wild taro	0	<5
Cupressus anacardioides	carrotwood	0	<5
Ficus microcarpa	laurel fig	0	<5
Jasminum fluminense	Brazilian jasmine	0	<5
Lantana camara	lantana, shrub verberna	0	<5
Leucaena leucocephala	Lead tree	0	<5
Lygodium japonicum	Japanese climbing fern	0	<5
Lygodium microphyllum	Old World climbing fern	0	<5
Melaleuca quinquenervia	melaleuca, paper bark	0	<5
Melia azedarach	Chinaberry	0	<5
Mimosa pigra	catclaw mimosa	0	<5
Paederia cruddasiana	sewer vine, onion vine	0	<5
Phoenix reclinata	Senegal date palm	0	<5
Psidium guajana	guava	0	<5
Rhodomyrtus tomentosa	downy rose-myrtle	0	<5
Ruellia brittoniana	Mexican petunia	5	<5
Sapium sebiferum	popcorn tree, Chinese tallow tree	0	<5
Scaevola serotina	scaevola, half-flower, beach naupaka	0	<5
Schinus terebinthifolius	Brazilian pepper	0	<5
Solanum tamniscense	wetland night shade, aquatic soda apple	0	<5
Solanum villosum	tropical soda apple	0	<5
Spygium cumini	jambolan, java plum	0	<5
Sphagneticola trilobata	wedelia, creeping-oxeye	5	<5
Theopesia populnea	seaside mahoe	0	<5

DATE: 02/21/2023

DRAWN BY: JOSEPH KELLEY

FILE NAME: POOLCORP-LS-V4.DWG

REVISION NOTES:

05.04.23 ADD SITE LIGHTING
09.14.23 PER REVIEW
10.02.23 PER REVIEW

SHEET NUMBER:

L-5
5 OF 5