



CONTEMPORARY DRINKING FOUNTAINS

GV Series

MODEL GVM49

BARRIER FREE, BI-LEVEL,
PEDESTAL MOUNTED
DRINKING FOUNTAIN

STANDARD FEATURES

- Adult ADA Compliant
- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Reinforced concrete with aggregate finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Access door, heavy duty steel, vandal resistant
- Vandal resistant galvanized steel bottom plate

SUGGESTED SPECIFICATIONS

Model GVM49 is a barrier free pedestal mounted, vandal resistant, bi-level square drinking fountain made from 18 gage, 304 stainless steel bowls mounted into a reinforced brown concrete aggregate pedestal. Unit shall be activated by front mounted self-closing buttons, by using less than 5 pounds of force, which activates internally mounted valves with adjustable stream regulators controlling the water flow. Bubblers shall be polished stainless steel with non-squirt features and operate on water pressure range of 20-105 psig. Fountain is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.



MODEL:

(Must Specify)

- ☐ GVM48 Tan Concrete Aggregate
- ☐ GVM49 Brown Concrete Aggregate (Shown)

OPTIONS

(additional costs may be incurred)

- ☐ -CH30 Child height, 30" bubbler height
- ☐ -FRU2 Freeze resistant, 2 valves ¹
- ☐ -FRU3 Freeze resistant, 3 valves ¹
- ☐ -FRU4 Freeze resistant, 4 valves ¹
- ☐ -FS Foot spray
- ☐ -HB1 Hose bibb, compression, with hose threaded outlet/VB ^{1 2}
- ☐ -HB2 Hose bibb, loose key, with hose threaded outlet/VB ^{1 2}
- ☐ -HB4 Hose bibb, loose key, recessed vandal resistant, with hose threaded outlet/VB ^{1 2}
- ☐ -IGM In-ground 14" mounting
- ☐ -JF1 Jug filler, spigot, self-closing valve with plain end ^{1 2}
- ☐ -JF2 Jug filler, pushbutton, self-closing valve with plain end ¹
- ☐ -NP2 Non-pollutable, freeze resistant, 2 valves
- ☐ -NP3 Non-pollutable, freeze resistant, 3 valves
- ☐ -NP4 Non-pollutable, freeze resistant, 4 valves
- ☐ -PF Pet fountain
- ☐ -SCS Square concrete step for pedestal fountain

Options Notes:

¹ See separate option sheet.

² This option is not available freeze-resistant.



Member of
U.S. Green
Building
Council



Recyclable
Product



Water
Conserving
Product

Please visit www.murdockmfg.com
for most current specifications.

Complies
with the
following
standards:



Federal
Public Law
111-380
(No Lead)



MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL




CONTEMPORARY DRINKING FOUNTAINS

All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.Murdockmfg.com for most current specifications.

GV Series MODEL GVM49

BARRIER FREE, BI-LEVEL,
PEDESTAL MOUNTED
DRINKING FOUNTAIN

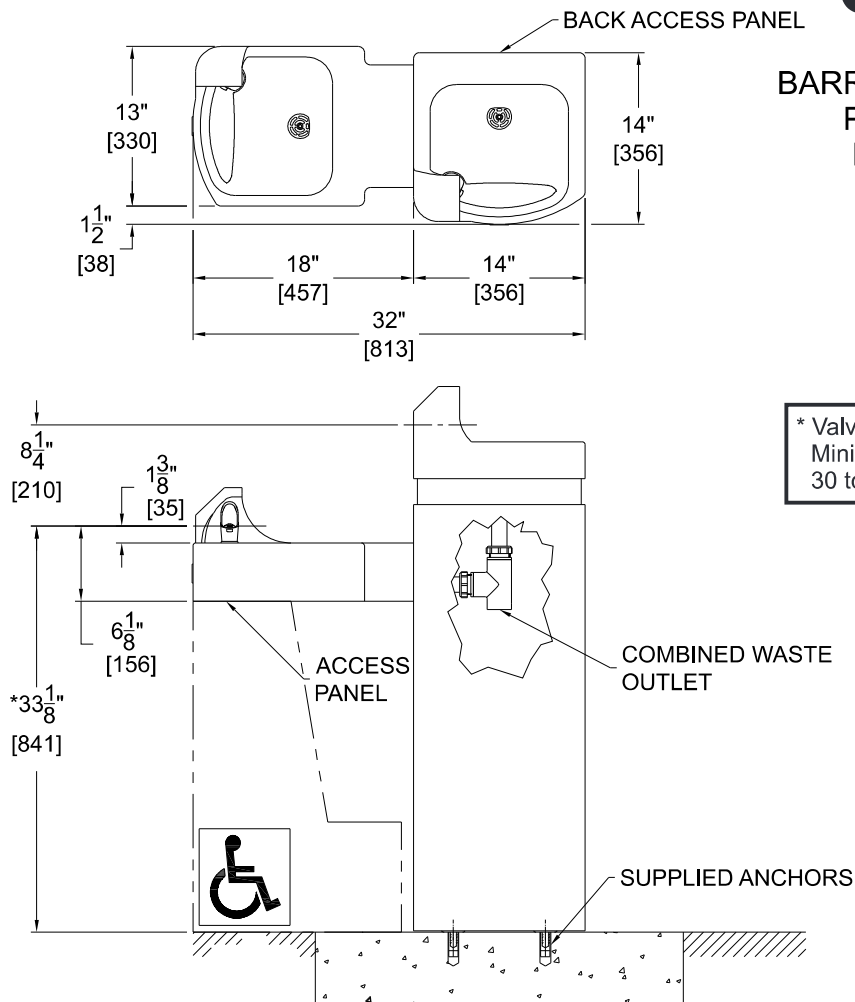

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. STANDARD ADULT ADA HEIGHT MODEL SHOWN. OPTIONAL -CH30 CHILD ADA HEIGHT MODEL AVAILABLE.
3. STOP VALVE NOT PROVIDED.

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL